

Industrial Couplings

Altra Couplings®

TB Wood's · Ameridrives · Huco Bibby Turboflex · Lamiflex · Guardian

The World Leader in Industrial Coupling Technology

Altra Couplings®


TB Wood's · Ameridrives · Huco Bibby Turboflex · Lamiflex · Guardian

Altra Couplings
offers the largest
selection of industrial
couplings available
from a single
source...worldwide.

The industry-leading brands of Altra
Couplings, TB Wood's, Ameridrives
Couplings, Bibby Turboflex, Ameridrives
Power Transmissions, Guardian Couplings,
Huco Dynatork and Lamiflex Couplings, have
been providing innovative coupling solutions to
meet the requirements for a broad variety of
applications spanning many industries. Highly
engineered Altra coupling products represent
the latest in coupling technology, featuring
superior design and exceptional quality to
ensure long-lasting performance in all types of
environments.





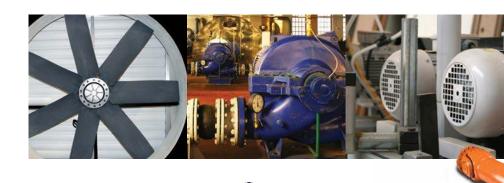





Elastomeric Couplings

L-Jaw • Sure-Flex® • Dura-Flex® • E-Flex



Torque Limiters
Bibbigard



General Purpose Disc Couplings

Form-Flex® • Floating Shafts • Turboflex GC® • Torsiflex® • Powerflex®



Precision Couplings

Flex B • Flex K • Flex M
Multi • Single Step Beam
Oldam • Uni-Lat, Flex P
Vari-Tork







Coupling Guards & Bearing Isolators





Americardan®







Form-Flex® • Fusaflex • FBA • FL • FH • Delta



Altra Couplings

offers the largest selection of industrial couplings available from a single source... worldwide.

For over 150 years, TB Wood's, Ameridrives, Bibby Transmissions, **Ameridrives Power** Transmissions, Guardian, Huco and Lamiflex, the industry-leading brands of Altra Couplings have been providing innovative coupling solutions to meet the requirements for a broad variety of applications spanning many industries. Highly engineered Altra coupling products represent the latest in coupling technology, featuring superior design and exceptional quality to ensure long-lasting performance in all types of environments.

High Performance Disc + Diaphragm Couplings



Ameriflex® by Ameridrives

Over 678 kNm; 6,000,000 in.lbs.

Unique diaphragm design permits high-torque density and low weight. Designed for years of dependable, low maintenance performance.

- Multiple, separated, convoluted diaphragms allow greatest design flexibility for most demanding applications
- API-671 compliant
- Best for high axial travel requirements



Ameridisco by Ameridrives

Over 140 kNm; 1,240,000 in.lbs.

Optimized disc profile for even stress distribution. Proprietary disc coating to prevent fretting and corrosion. Designed for years of dependable, low-maintenance performance.

- Industry leader in power density
- API-671 compliant
- Best for reduced moment applications



TurboFlex HP by Bibby

Up to 600 kNm; 5,300,000 in.lbs.

These torsionally stiff, light weight couplings are capable of transmitting high torques at high speeds while accepting significant levels of angular, radial, and axial misalignment. They are easy to install, suitable for hostile environments, require no lubrication and feature a high torque to weight ratio. Specific designs are available which meet the customer's exact requirements.

Standard units are compliant with API 671 (American Petroleum Institute) and ATEX 94/9/EC.

- No maintenance
- Standard and reduced moment designs available
- Capable of being torsionally tuned to suit specific machinery requirements

Typical Applications

- Gas and Steam Turbines
- Compressors
- Generators
- Pumps
- Marine/Offshore Platform
- Pipelines

Typical Applications

- Gas and Steam Turbines
- Compressors
- Generators
- Pumps
- Marine/Offshore Platform
- Pipelines

- Gas and Steam Turbines
- Compressors
- Generators
- Pumps
- Marine/Offshore Platforms
- Pipelines
- Test equipment



Gear Spindles



SM, SF, SL Series by Ameridrives

Up to 7,350 kNm; 65,000,000 in.lbs.

Designed for medium to high torque mill applications which require rugged strength. Units can operate at high misalignment angles.

- · Flanged, leveler and mill types
- · Fully crowned hub gear teeth
- One-piece, molded lip-type seals
- High degree of strength
- Advanced gear design increasing torque capacity for a given diameter

Grid + Gear Couplings



G-Flex by Bibby

Up to 169 kNm; 1,500,000 in.lbs.

State-of-the-art design from Bibby Transmissions, the original grid coupling manufacturer. G-Flex/Bibby 2000 Series is an all-metal coupling that provides positive protection against the damaging effects of shock loads and vibration. Aluminum horizontal cover (T10), and all-steel vertical cover (T20) designs are available. G-Flex tapered grid couplings are an excellent choice where torsional flexibility/vibration damping are primary concerns.

- Easy to assemble / replace
- Part-for-part interchangeable with industry standard tapered grid coupling designs
- Coupling sizes 1020 through 1140 in-stock in a range of standard bore sizes
- Shot-peened tapered grid flex element for long life



Amerigear by Ameridrives

Up to 6,680 kNm; 60,000,000 in.lbs.

Fully-crowned gear teeth provide operational benefits including maximum load-carrying capacity with minimum size, maximum reliability and long life.

- Both "0" ring and metal seal models are available
- · Strong, rigid floating sleeve
- Precision-machined identical hubs
- · Positive dust-tight seals



Series II by Bibby

Up to 147 kNm; 1,300,000 in.lbs.

Fully-crowned gear teeth provide maximum contact at the strongest part of the tooth.

- Models available for use on vertical and/or horizontal shafts
- Bore capacity up to 510 mm
- High torque to weight ratio
- Half per half interchangeability

Typical Applications

- Steel Mill Main Drives for Cold and Hot Strip Mills
- Bar and Rod Mills
- Auxiliary Mill Drives
- Levelers

Typical Applications

- Pumps
- Gear Boxes
- Electric Motors
- Fans/Blowers
- Conveyors
- · Compressors

Typical Applications

- Cranes and Hoists
- Elevators
- Offshore
- Draglines and Shovels
- Textile Machinery
- Fans/Blowers
- Air Compressors
- Ore Crushers
- Centrifugal Pumps

- Steam Turbines
- Printing Presses
- High Torque Motors

Altra Couplings



General Purpose Disc Couplings



Form-Flex® by TB Wood's

Up to 270 kNm; 2,400,000 in.lbs.

Form-Flex metal disc couplings consist of two hubs, a spacer and two high strength carbon or stainless steel flexible discs. Modified and special designs are commonly supplied to meet specific application conditions. Available in carbon steel, stainless steel or with corrosion resistant coatings.

- No maintenance
- Zero backlash
- Close couple, spacer and floating shaft designs available
- · Easy interchangeability



Floating Shafts by TB Wood's

Up to 270 kNm; 2,400,000 in.lbs.

Floating shaft couplings are specifically designed for long span applications from 24" to over 300". Tru-Tube composite tubes (shown) can be specified for spans up to 220" (6 meters). Composite tubes weigh up to 80% less than steel and can eliminate the cost of bearing supports and other structures.

- Horizontal or vertical applications
- Custom designed to specification
- Steel, stainless steel or composite tube construction



Turboflex GC® by Ameridrives

Up to 180 kNm; 1,600,000 in.lbs.

GC Series couplings feature unitized, straight-sided flexible discs for ease of installation. Up-to-date design targeted specifically for heavy industrial applications. These couplings provide increased torque capacity per size by taking advantage of the latest materials and design technologies.

- Unitized Flex Packs
- · Easier, faster installation
- Interchangeable with industry standard designs
- Fewer sizes to cover a full range of applications
- · Reduced spare parts inventory
- · Lower total cost of ownership
- Special designs available for higher-torque applications



Torsiflex® by Bibby

Up to 60 kNm; 530,000 in.lbs.

Torsiflex couplings are specifically designed for the process pump and general industrial markets.

Torsiflex is an all-metal disc coupling requiring no lubrication which incorporates a plug-in feature to allow installation and removal without disturbing the pump alignment.

Standard units are compliant with API-610 (American Petroleum Institute) and the more demanding API-671 standard can be achieved. In addition, the coupling is certified to meet ATEX 94/9/EC.

- No maintenance
- Zero backlash
- Custom designs including close coupled, long spacer arrangements available
- Easy interchangeability
- Standard sizes available from stock

Typical Applications

- Pumps and Compressors
- Engine Driven Equipment
- Printing Presses
- Machine Tools
- Positioning Systems
- Food Processing Equipment
- Cooling Tower Fans
- . Blowers and Ventilating Fans
- Test Equipment

Typical Applications

- · Cooling Tower Fans
- Vertical Pumping Systems
- Mine Ventilation Fans
- Fans/Blowers
- Test Equipment

Typical Applications

- Compressors
- Engine Driven Equipment
- Ventilating Fans
- Pumps

- Pumps
- Compressors
- Engine Driven Equipment
- Machine Tools
- Food Processing Equipment
- Blowers
- Ventilating Fans
- Test Equipment





Powerflex® by Lamiflex

Up to 230 kNm; 2,000,000 in.lbs.

Powerflex disc couplings are a reliable solution for a mechanical power transmission between drives (Turbines, Electrical Motors, Engines, etc.) and rotating driven machines. Modified and optimized disc profile provides a superior stress distribution.

The condition of the flexible units can be checked while the machine is running, also suitable for harsh environments while accepting high misalignments levels.

- No need for lubrication and maintenance
- Zero backlash, no wearing parts
- Visual inspection
- High level inherent balance

Torque Limiters



Bibbigard by Bibby

Up to 169 kNm; 38,000 lbf.*

Bibbigard safety element torque limiters incorporate a number of safety element modules of a specific size mounted between two flanges and preset to release at a specified torque value in order to protect the drive system from expensive damage and lost production. They can be used with various types of drive medium many of which are available from Altra Industrial Motion. Bibbigard has been successfully utilized in many different industries where, subject to space availability, the release torque capacity is virtually unlimited.

- Accurate release torque repeatability
- Simple fast manual re-engagement
- · Low-cost maintenance
- · Versatile mounting capability

Locking Devices



HLD & MLD Series by Ameridrives

Up to 6,000 kNm; 4,425,372 ft.lb.

Ameriloc® wind turbine shaft locking devices from Ameridrives provide secure shaft/hub connections.

Ameriloc HLD (Hydraulic Locking Devices) provide significant time savings during installation. With larger diameters, such as 20.8 in. (530 mm), HLD units can be tensioned in only a few minutes. Hydraulic pump required for assembly.

Ameriloc MLD (Mechanical Locking Device) units eliminate the need for keyways or splines, provide unlimited shaft positioning, and feature zero backlash, reduced shaft stress, and high contact pressure for greater torque. The MLD series can fit into smaller installations and requires standard tools to assemble.



Internal/External/Shaft by Ameridrives

Up to 5,835 kNm; 4,303,675 ft.lb.

Ameriloc® internal and external locking devices and shaft couplings are custom-engineered, manufactured, and tested to precise tolerances to meet specific customer requirements and provide years of trouble-free service.

Units eliminate the need for keyways, splines, or hydraulic hubs; allowing for unlimited shaft positioning. Pre-assembled units are easy to install and remove using standard tools. Features include zero backlash, reduced shaft stress, and high contact pressure for greater torque. Tight contact prevents contamination in high dust and moisture environments.

Typical Applications

- Pumps
- · Compressors
- Steam Turbines / Electric Motors
- Paper Machines
- Fans / Blowers
- · Pipelines / Offshore Platforms

- Typical ApplicationsSteel Mill Equipment
- Conveyor Drives
- Twin Screw Extruders
- · Wood Grinding Machinery
- Ball Mill Drives
- Water Treatment Equipment
- Tunnel Boring Machines

Typical Applications

Wind Turbines

- Test Stands
- Printing Presses
- . Mining Crushers
- Meat Processing
- Compressors
- · Pulp & Paper
- Cranes
- Steel Mills



Elastomeric Couplings



L-Jaw by TB Wood's

Up to 0.70 kNm; 6,228 in.lbs.

The Jaw-type elastomeric coupling is an economical, proven solution for general purpose applications. Jaw couplings are easy to install and require no lubrication or maintenance. Four different flexible insert types are available: Buna-N rubber, Urethane, Hytrel™ and Bronze. Jaw couplings are an excellent choice for all light and medium duty general purpose industrial applications.

- No maintenance/lubrication
- Part-for-part interchangeable with industry standard design
- Fail-safe design equipment will continue to drive if elastomer fails
- Wide range of in-stock inch and metric bore sizes



Sure-Flex_® by TB Wood's

Up to 8.20 kNm; 72,480 in.lbs.

Sure-Flex is a TB Wood's original! Sure-Flex Couplings utilize a rubber (EPDM or Neoprene) or Hytrel™ thermoplastic flex element (sleeve) to transmit torque and accommodate shaft misalignments. Sure-Flex couplings have exceptional torsional flexibility, and the 4-way flexing action absorbs virtually all types of shock, vibration, misalignment, and end float. Sure-flex couplings are an excellent choice when low cost, high flexibility, vibration damping, and easy installation are primary concerns.

- · Easy assembly
- Spacer, bushed hub, and clamping hub designs in stock
- Flexible design accommodates misalignment and protects equipment



Dura-Flex_® by TB Wood's

Up to 4.50 kNm; 39,500 in.lbs.

Dura-flex couplings "split-inhalf" element design allows for easy element installation/ replacement without moving connected equipment or disturbing the shaft connection. Spacer design can accommodate a large range of shaft spacing with few parts. Patented design minimizes bond stress for long coupling life. Highly flexible and able to accommodate shaft misalignment while minimizing vibration and preventing damage to connected equipment.

- Easy to assemble/replace
- High misalignment ratings
- No maintenance/lubrication
- Part-for-part interchangeable with industry standard design
- In-stock versatile spacer design can accommodate many configurations with few parts



E-Flex by Bibby

Up to 96 kNm; 850,000 in.lbs.

These pin and bush couplings accept parallel, angular and axial misalignment and can provide considerable torsional flexibility.

- · Vertical or horizontal operation
- 80 or 90 shore hardness close fitting flexible elements
- Steel or cast iron hubs
- Brake drum or disc available as well as special designs

Typical Applications

- Pumps
- Fans/Blowers
- Electric Motors
- Compressors

Typical Applications

- Pumps
- Fans/Blowers
- Compressors
- Electric Motors
- Mixers
- Conveyors

Typical Applications

- Pumps
- Fans/Blowers
- Compressors
- Electric Motors
- Conveyors

- Pumps
- Fan Drives
- Various Steelworks Drives
- Twin Screw Extruder Drives
- Packaging Machinery



Precision Couplings



Flex B, Flex K, Flex M **bv** Huco

Up to 500 Nm; 4,425 in.lbs.

Flex B Bellows

Precision Bellows coupling with excellent kinematic properties. Two types offer differing combinations of stiffness, misalignment and axial motion.

Flex K Large Bellows

Large Precision Bellows coupling with excellent kinematic properties. Two types offer differing combinations of stiffness, misalignment and axial motion.

Flex M Disc

Precision Disc coupling with excellent kinematic properties. Dynamically balanced construction. Single-stage versions make up into 'whirl' free Cardans. Two-stage versions offer short envelopes and low bearing loads.



Multi, Single, Step Beam by Huco

Up to 140 Nm; 1,239 in.lbs.

Multi Beam

Zero backlash single-piece couplings. Single stage (3-beam); two stage (6-beam). Material options available for moisture and corrosion resistance.

Single Beam

Zero backlash single-piece couplings. More flexible than Multi-Beam but less torsionally rigid.

Step Beam

Unique plastic coupling design provides an excellent combination of radial flexibility with torsional stiffness.



Oldham, Uni-Lat, Flex P **bv** Huco

Up to 44 Nm; 389 in.lbs.

Zero/low backlash couplings, robust design. Easy to use 3-part couplings with replaceable wear elements.

Pull-apart re-engage facility for blind assemblies.

Uni-Lat

Unique, light-duty couplings with generous angular and radial misalignment compensation. Resists axial motion, can anchor unrestricted shafts and perform light push/pull duties.

Flex P

Exceptional flexibility in all three directions: radial, angular and axial.



Vari-Tork by Huco

Up to 3 Nm; 27 in.lbs.

Small, user-adjustable torque limiters for concentric or in-line mounting. Operates by friction using interleaved clutch plates.

Friction clutches interrupt rotation when the load being transmitted reaches a pre-determined threshold. Clutches help protect personnel and equipment.

Typical Applications

- High-End Servo Drives
- Pulse Generators
- Scanners
- Positioning Slides
- High Speed Dynamometers
- Unsupported Drive Shafts
- · Metering Valves

Typical Applications

- · Stepper and Servo Drives
- Encoders
- · General Purpose
- Tachometers
- Small Pumps
- Motors and Drives
- Light-Duty Power **Transmission Applications**

Typical Applications

- Stepper drives
- Encoders
- Resolvers
- Tachometers
- Potentiometer Drives
- Small Positioning Slides
- Dosing Pumps
- Light power drives Small Generators

Typical Applications

· All types of small drives



Universal Joints



Americardan® by Ameridrives PT

Up to 4,800 kNm; 42,450,000 in.lbs.

Designed for operation at high misalignment angles up to 15°. Bearing and seal design resists lubrication loss and contamination. Ideal for use in severe atmospheric conditions. Light and heavy-duty models available.

- One-piece, yoke and bearing housing construction
- High degree of strength with minimum distortion under load
- Round bearing and wing style designs available

Typical Applications

- Cement Mixers/Crushers
- Rubber Mixers
- Metal Shredders
- Mining Conveyors/Pumps/ Off Highway Equipment
- Paper Calendars/Couch/ Dryer/Mixer/Winder Rolls
- Irrigation Systems
- Primary Steel Rolling Mills

Coupling Guards



Coupguard® by Lamiflex

Several Sizes available

The Coupguard® is an effective and safe solution to protect people from moving hazards, also protect equipment and components from external and environmental damage. Coupguard® is easy to assemble and they also can be opened or removed to inspect the coupling or other connection parts after proper lock out procedures have been followed. Coupguard are sized to overall applications and can accomodate a wide range of equipment and shaft coupling types.

- · Low Initial Cost
- Hinged door open quickly for inspection
- Safety Compliance and Orange in color
- Ambient Temperatures up to 155°C
- Axial and Radial air flow
- Length and height adjustment
- Custom design available
- Petrobras Patented Product
- API / ANSI / ABNT standards

Typical Applications

- Pumps
- Compressors
- Fans
- Steam turbines
- Conveyors
- · Paper Machines

Bearing Isolators



Ecoblock®, Ecobearing® by Lamiflex

Sizes up to 200mm / 4.5 inches

Innovation, technology, and bearing life are the main reason to use bearing isolators. Bearing isolators are a non-contact, non-wearing, permanent bearing protection devices. They prevent humidity and external contamination, retains lubrication and provides static and dynamic sealing for all kinds of bearing box used in the industry.

- Ecoblock

It is an economical solution for general purpose applications retrofitting lip seals and other bearings contacting sealing.

- **Ecobearing** (Petrobras Patent) Are specially designed to meet the API specifications.
- Zero oil or grease leakage
- Environment protection
- Increasing bearing life and MTBF
- · Static and dynamic sealing
- · Non-contact, Non-wearing
- Standard sizes available from stock

- Electric Motors
- Pumps
- Gearboxes
- Pillow block
- Steam turbines
- Fans
- Oil mist

Online Resources

www.altramotion.com

Everything Altra

From the Altra homepage you can connect to all of our brands, and visit our market portals to find solutions for your specific needs.


www.altramotion.com



Literature Portal

Conveniently download and request Altra's latest catalogs, brochures, service manuals and more on the Literature Portal. Find the latest product information to meet your power transmission requirements by going to any Altra brand website and clicking on the Literature tab.

www.altraliterature.com

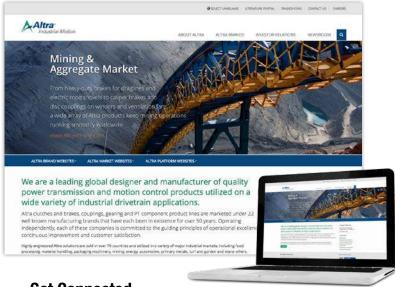

Get Connected

The Altra Newsroom makes it quick and easy for you to get the news you need when you need it. From new literature releases to trade show schedules, the news is at your fingertips 24 hours a day.

www.altramotion.com/newsroom



Altra Industrial Motion The Power Of Experience

Ameridrives Couplings
Ameridrives Power
Transmission
Bauer Gear Motor
Bibby Turboflex
Boston Gear

Delroyd Worm Gear Formsprag Clutch Guardian Couplings Huco Dynatork Industrial Clutch Inertia Dynamics Kilian Manufacturing Lamiflex Couplings Marland Clutch Matrix International Nuttall Gear Stieber Clutch

Svendborg Brakes TB Wood's Twiflex Limited Warner Electric Warner Linear Wichita Clutch









Like us on Facebook and follow us on Twitter for up to the minute news you can use. Link with us on LinkedIn, follow us on Google+, and find us on YouTube to watch training videos and application movies.

Altra Industrial Motion

All Customer Service phone numbers shown in bold

Belted Drives and Sheaves

TB Wood's

Belted Drives

Chambersburg, PA - USA 1-888-829-6637 - Press #5

For application assistance: 1-888-829-6637 — Press #7

Couplings

Ameridrives Couplings

Mill Spindles, Ameriflex, Ameridisc

Erie, PA - USA 1-814-480-5000

Gear Couplings

San Marcos, TX - USA 1-800-458-0887

Ameridrives Power Transmission

Universal Joints, Drive Shafts, Mill Gear Couplings

Green Bay, WI - USA 1-920-593-2444

Bibby Turboflex

Disc, Gear, Grid Couplings, Overload Clutches

Dewsbury, England +44 (0) 1924 460801

Boksburg, South Africa +27(0) 11 918 4270

Guardian Couplings

Engineered Flywheel Couplings, Engine Housings and Pump Mounts, Flexible Shaft Couplings

Michigan City, IN - USA 1-219-874-5248

Huco Dynatork

Precision Couplings and Air Motors

Hertford, England +44 (0) 1992 501900

Chambersburg, PA - USA 1-888-829-6637

Couplings Cont.

Lamiflex Couplings

Flexible Couplings, Bearing Isolators, and Coupling Guards São Paulo, SP - Brasil +55 (11) 5679-6533

TB Wood's

Elastomeric Couplings

Chambersburg, PA - USA 1-888-829-6637- Press #5

For application assistance: 1-888-829-6637 — Press #7

General Purpose Disc Couplings

San Marcos, TX - USA 1-888-449-9439

Electromagnetic Clutches and Brakes

Inertia Dynamics

Spring Set Brakes; Power On and Wrap Spring Clutch/Brakes

New Hartford, CT - USA 1-800-800-6445

Matrix International

Electromagnetic Clutches and Brakes, Pressure Operated Clutches and Brakes

Brechin, Scotland +44 (0) 1356 602000

New Hartford, CT - USA 1-800-825-6544

Warner Electric

Electromagnetic Clutches and Brakes

New Hartford, CT - USA 1-800-825-6544

For application assistance: 1-800-825-9050

Saint Barthélémy d'Anjou, France +33 (0)2 41 21 24 24

Precision Electric Coils and Electromagnetic Clutches and Brakes

Columbia City, IN - USA 1-260-244-6183

Engineered Rearing Assemblie

Kilian Manufacturing

Engineered Bearing Assemblies

Syracuse, NY - USA 1-315-432-0700

Gearing

Bauer Gear Motor

Geared Motors

Esslingen, Germany +49 (711) 3518-0

Somerset, NJ - USA 1-732-469-8770

Boston Gear

Enclosed and Open Gearing, Electrical and Mechanical P.T. Components

Charlotte, NC - USA 1-800-825-6544

For application assistance: 1-800-816-5608

Nuttall Gear and Delroyd Worm Gear

Worm Gear and Helical Speed Reducers

Niagara Falls, NY - USA 1-716-298-4100

Heavy Duty Clutches and Brakes

Industrial Clutch

Pneumatic and Oil Immersed Clutches and Brakes

Waukesha, WI - USA 1-262-547-3357

Svendborg Brakes

Industrial Brakes and Brake Systems

Vejstrup, Denmark +45 63 255 255

Twiflex Limited

Caliper Brakes and Thrusters Twickenham, England +44 (0) 20 8894 1161

Heavy Duty Clutches and Brakes Cont.

Wichita Clutch

Pneumatic Clutches and Brakes

Wichita Falls, TX - USA 1-800-964-3262 Bedford, England

+44 (0) 1234 350311

Linear Products

Warner Linear

Linear Actuators
Belvidere, IL - USA
1-800-825-6544

For application assistance: 1-800-825-9050

Saint Barthélémy d'Anjou, France +33 (0)2 41 21 24 24

Overrunning Clutches

Formsprag Clutch

Overrunning Clutches and Holdbacks

Warren, MI - USA 1-800-348-0881- Press #1

For application assistance: 1-800-348-0881 — Press #2

Marland Clutch

Roller Ramp and Sprag Type Overrunning Clutches and Backstops

South Beloit, IL - USA 1-800-216-3515

Stieber Clutch

Overrunning Clutches and Holdbacks

Heidelberg, Germany +49 (0) 6221-30470

For information concerning our sales offices in Asia Pacific check our website

Altra® Industrial Motion

www.altramotion.com

300 Granite Street Braintree, MA 02184 - USA 781-917-0600 Fax: 781-843-0709

Altra Couplings Group

TB Wood's 1-888-829-6637 – Press #5 +44 (0) 1992 501900

Bibby Turboflex +44 (0) 1924 460801

1-800-779-6993

Guardian Couplings 1-219-874-5248

ood's Huco Dynatork

- Press #5 1-888-829-6637 - Press #5 900 +44 (0) 1992 501900

Ameridrives Power Transmission

1-920-593-2444 +44 (0) 1924 460801 Ameridrives Couplings

1-814-480-5000

Lamiflex Couplings +55 11 5679 6533

+55 11 5679 7735

P-1744-CG 12/14 Printed in USA